



SMART
INTELLIGENT
SECURITY



CCTV CATALOGUE 2019

ABOUT US



Secureye is a world leader in design, development and manufacturer of Electronic Security Systems and supporting equipments. Secureye produces a complete product range of Analog & IP Cameras, Accessories, Digital Video Recorder, Biometric Time Attendance, Access Control System, Analog & IP Video Door Phone System, Virtual Central Locking System, Central Monitoring System, Home Automation System.

Secureye constantly strives to maintain its position as the most reliable manufacturer in the industry. Secureye attributes its great success and robust growth to the company's ability to provide courteous, ontime services and dependable products.

From its impressive manufacturing facility and through a responsive global network of sales representatives, Secureye continues to offer new technologies, products and services that constantly confirm the company's position as the security industry's premier electronic security systems and equipment manufacturer.

Why Secureye is better than others

Secureye is a well know brand in Electronic Security Segment, which is aggressively distributed by "Fortune Marketing Pvt. Ltd." which having head office in New Delhi and having its presence all across the country with 22 branches.

The company has earned a reputation for delivering innovative design and reliable products. The products adopt the latest state of the art technology in the manufacturing process that is well accepted worldwide to meet the International Quality & Safety Standards.

Secureye is a technology driven company, believes in investing a significant part of its revenues in Research & Development which enables the company to bring out the best available solution to the market.

- **Quality Control:** Secureye products come in market after physical testing.
- **Fast Response Time:** We have specialized dedicated team to provide fast Pre & Post Sale Service support
- **Certifications:** All Secureye products have international quality standard certifications i.e. CE , ISO 9001:2008, 27001:2013 & FCC.

Service Center Across India

Ahmedabad, Bangalore, Bhubaneswar, Chandigarh, Chennai, Cochin, Dehradun, Ghaziabad, Gurgaon, Guwahati, Goa, Hyderabad, Indore, Jaipur, Kolkata, Lucknow, Ludhiana, Mumbai, New Delhi, Nagpur, Pune, Raipur

For any inquiries, please contact
sales@secur-eye.com
Toll Free: 1800 1022 366
www.secureye.com

Analog HD CCTV Camera



2MP: SD-2MPIR-N
4MP: SD-4MPIR-N

Dome IR Camera

- Megapixel CMOS Sensor
- 3.6mm Fixed Lens
- 20m Smart IR Range
- 2/4MP Resolution
- 25/30 FPS



2MP: SW20-2MPIR-N
4MP: SW20-4MPIR-N

Bullet IR 20m Camera

- Megapixel CMOS Sensor
- 3.6mm Fixed Lens
- 20m Smart IR Range
- 2/4MP Resolution
- 25/30 FPS



2MP: SW40-2MPIR-N
4MP: SW40-4MPIR-N

Bullet IR 40m Camera

- Megapixel CMOS Sensor
- 6mm Fixed Lens
- 30 ~ 40m Smart IR Range
- 2/4MP Resolution
- 25/30 FPS
- IP66 RATED

SERIES FALCON



2MP: SD-2MPIR

Dome IR Camera

- 1/2.9" CMOS Sensor
- 3.6mm Fixed Lens
- Smart IR Range up to 20m
- 25/30 FPS



2MP: SW20-2MPIR

Bullet IR 20m Camera

- 1/2.9" CMOS Sensor
- 3.6mm Fixed Lens
- Smart IR Range up to 20m
- 25/30 FPS
- IP66 RATED



5MP: S-CCA2

Dome IR Camera

- 1/2.5" CMOS Sensor
- 3.6mm Fixed Lens
- Smart IR Range up to 20m
- 5MP: AHD/TVI
- 4MP: AHD/TVI/CVI



5MP: S-CCA1

Bullet IR 20m Camera

- 1/2.5" CMOS Sensor
- 3.6mm Fixed Lens
- Smart IR Range up to 20m
- 5MP: AHD/TVI
- 4MP: AHD/TVI/CVI
- IP66 RATED

SPEED DOME CAMERA



1.3MP: S-HSD-1AHD-10XP
2MP : S-HSD-2AHD-10XP

10x High Speed Dome Cameras

- HD CMOS Sensor
- 10x Optical Zoom
- 5 ~ 50mm Lens
- 40m IR Range
- 1.3MP / 2MP Resolution
- 128 Preset Position



**Metal Housing
IP66**

1.3MP: S-HSD-1AHD-10XM
2MP : S-HSD-2AHD-10XM

10x High Speed Dome Cameras

- HD CMOS Sensor
- 10x Optical Zoom
- 5 ~ 50mm Lens
- 60m IR Range
- 1.3MP / 2MP Resolution
- 128 Preset Position



1.3MP: S-HSD-1AHD-36XP
2MP : S-HSD-2AHD-36XP

36x High Speed Dome Cameras

- 1/2.8" HD CMOS Sensor
- 36x Optical Zoom
- 5 ~ 120mm Lens
- 120m IR Range
- 1.3MP / 2MP Resolution
- 255 Preset Position



**Metal Housing
IP66**

1.3MP: S-HSD-1AHD-36XM
2MP : S-HSD-2AHD-36XM

36x High Speed Dome Cameras

- 1/2.8" HD CMOS Sensor
- 36x Optical Zoom
- 5 ~ 120mm Lens
- 150m IR Range
- 1.3MP / 2MP Resolution
- 255 Preset Position



S-4DK

4D Keyboard Controller

- Kind: 4 Axis
- Signal System: NTSC/PAL
- Video In: 1.0Vpp, 75 ohms(BNC) 1ch video in
- Video Out: 1.0Vpp, 75 ohms(BNC) 1ch video out
- Com. Interface: RS485
- Com. Protocol: Pelco D

Intelligent 5 In 1 XVR

AHD/CVBS/HDCVI/HDTV/MP Supported Camera Type



S-4C1S-2M-N

4 CH XVR

- Embedded LINUX OS
- H.264/ H.264+ Compression
- Video input 4ch BNC
- Audio In/Out 1/1ch RCA
- Up to 2MP Camera Supported
- Playback Resolution:1080N
- 1 SATA Supported



S-8C1S-2M-N

8 CH XVR

- Embedded LINUX OS
- H.264/ H.264+ Compression
- Video input 8ch BNC
- Audio In/Out 1/1ch RCA
- Up to 2MP Camera Supported
- Playback Resolution:1080N
- 1 SATA Supported



S-16C2S-2M-N

16 CH XVR

- Embedded LINUX OS
- H.264/ H.264+ Compression
- Video input 16ch BNC
- Audio In/Out 1/1ch RCA
- Up to 2MP Camera Supported
- Playback Resolution:1080N
- 2 SATA Supported



S-16C2H-2M

16 CH XVR

- Embedded LINUX OS
- H.264/ H.264+ Compression
- Video input 16ch BNC
- Audio In/Out 16/1ch RCA
- Up to 2MP Camera Supported
- Playback Resolution:1080N
- 2 SATA Supported



S-4C1S-2M / S-S-4C2H-4MDG

4 CH XVR

- Embedded LINUX Operating System
- H.264/H.264+/H.265/H.265+ Video Compression
- Video input 4ch BNC
- Audio Input 1ch RCA
- Up to 2MP Camera Supported
- Playback Resolution:1080P Lite
- 1 SATA Supported



S-8C1S-2M / S-S-8C2H-4MDG

8 CH XVR

- Embedded LINUX Operating System
- H.264/H.264+/H.265/H.265+ Video Compression
- Video input 8ch BNC
- Audio Input 1ch RCA
- Up to 2MP Camera Supported
- Playback Resolution:1080P Lite
- 1 SATA Supported



S-16C2S-2M / S-S-16C1H-4MDG

16 CH XVR

- Embedded LINUX Operating System
- H.264/H.264+/H.265/H.265+ Video Compression
- Video input 16ch BNC
- Audio Input 1ch RCA
- Up to 2MP Camera Supported
- Playback Resolution:1080P Lite
- 2 SATA Supported

Smart Analytics: Line Crossing, Area Intrusion

5MP Series



S-S-4C1S-4MDG

4 CH XVR

- Embedded LINUX Operating System
- H.265/H.265+ Video Compression
- Video input 4ch BNC
- Audio Input 1ch RCA
- Up to 5MP Camera Supported
- Playback Resolution:1080P
- 1 SATA Supported



S-S-8C1S-4MDG

8 CH XVR

- Embedded LINUX Operating System
- H.265/H.265+ Video Compression
- Video input 8ch BNC
- Audio Input 1ch RCA
- Up to 5MP Camera Supported
- Playback Resolution:1080P
- 1 SATA Supported



S-S-16C2S-4MDG

16 CH XVR

- Embedded LINUX Operating System
- H.265/H.265+ Video Compression
- Video input 16ch BNC
- Audio Input 1ch RCA
- Up to 5MP Camera Supported
- Playback Resolution:1080P
- 2 SATA Supported



S-S-32C2S-4MDG

32 CH XVR

- Embedded LINUX Operating System
- H.265/H.265+ Compression
- Video input 32ch BNC
- Audio Input 1ch RCA
- Up to 5MP Camera Supported
- Playback Resolution:1080P
- 2 SATA Supported

IP CCTV Camera

Support RTSP / DHCP / NTP / ONVIF, GB / T28181 network protocol

IBIS SERIES



1.3MP: SIP-1.3HD-DIR-265
2MP: SIP-2HD-DIR
4MP: SIP-4HD-DIR

Dome IR Camera

- 1/3" Megapixel CMOS Sensor
- 3.6 mm Fixed Lens
- IR Range 15 ~ 20m
- H.265+/H.265/H.264 compression



1.32MP: SIP-1.3HD-W20-265
2MP: SIP-2HD-W20-265
4MP: SIP-4HD-W20-265

Bullet IR Camera 20m

- 1/3" Megapixel CMOS Sensor
- 3.6 mm Fixed Lens
- IR Range 15 ~ 20m
- H.265+/H.265/H.264 compression
- IP66 RATED



1.3MP: SIP-1.3HD-W40-265
2MP: SIP-2HD-W40-265
4MP: SIP-4HD-W40-265

Bullet IR Camera 40m

- 1/3" Megapixel CMOS Sensor
- 6 mm Fixed Lens
- IR Range 15 ~ 20m
- H.265+/H.265/H.264 compression
- IP66 RATED



- 1/3" Megapixel CMOS Sensor
- Built-in Audio MIC
- 3.6 mm Fixed Lens
- IR Range 15 ~ 20m
- H.265+/H.265/H.264 video compression
- POE Supported

SIP-2HD-W20P-A

Bullet IR Camera 20m With Audio



2MP: SIP-2HD-DIRA

Dome IR Camera With Audio

- 1/3" Megapixel CMOS Sensor
- Built-in Audio MIC
- 3.6 mm Fixed Lens
- IR Range 15 ~ 20m
- H.265+/H.265/H.264 video compression
- POE Supported

SERIES FALCON



2MP: SIP-2HD-DIRE

Dome IR Camera

- 1/2.7" Progressive scan CMOS
- 3.6mm (6mm optional) Lens
- Smart IR Range 20 ~ 30m
- H.265+/H.265/H.264 video compression



4MP: SIP-4HD-DIRE

Dome IR Camera

- 1/2.5" Progressive scan CMOS
- 3.6mm (6mm optional) Lens
- Smart IR Range 20 ~ 30m
- H.265+/H.265/H.264 video compression



**2MP: SIP-2HD-W20E
4MP: SIP-4HD-W20E**

Bullet IR Camera 20m

- 1/2.5" Progressive scan CMOS
- 3.6mm (6mm optional) Lens
- Smart IR Range 20 ~ 30m
- H.265+/H.265/H.264 video compression
- IP66 rated



**2MP: SIP-2HD-W40V
4MP: SIP-4HD-W40V**

Bullet IR Camera 35m

- 1/2.9" Progressive scan CMOS
- 2.8 ~ 12mm Varifocal Lens
- Smart IR Range 25 ~ 35m
- H.265+/H.265/H.264 + H.264 video compression
- IP66 rated

Support Defog, AWB, AGC, DWDR, ROI, BLC, HLC, UPnP-TM

SPEED DOME CAMERA



**Metal Housing
IP66**

2MP: SIP-HSD-2HD-10XM

10x High Speed Dome Cameras

- 1/4" Color CMOS Sensor
- 10x Optical Zoom
- 2MP Resolution
- Focus Length 5 ~ 50mm
- 60m IR Range
- Preset 128
- H.264 Compression



**Metal Housing
IP66**

2MP: SIP-HSD-2HD-36XM

36x High Speed Dome Cameras

- 1/4" Color CMOS Sensor
- 36x Optical Zoom
- 2MP Resolution
- Focus Length 5 ~ 120mm
- 150m IR Range
- Preset 256
- H.264 Compression



**Metal Housing
IP66**

3MP: SIP-HSD-3HD-36XM

36x High Speed Dome Cameras

- 1/1.8" CMOS Sensor
- 36x Optical Zoom
- 3MP Resolution
- Focus Length 5 ~ 120mm
- 150m IR Range
- Preset 256
- H.264 Compression



**Metal Housing
IP66**

5MP: SIP-HSD-5HD-36XM

36x High Speed Dome Cameras

- 1/1.8" CMOS Sensor
- 36x Optical Zoom
- 5MP Resolution
- Focus Length 5 ~ 120mm
- 150m IR Range
- Preset 256
- H.264 Compression




SIP-1S-2HD-8

8 Ch NVR

- H.265 +/H.265/H.264 Compression
- Up to 5MP Camera Supported
- Playback Resolution: 1080P
- 1 SATA Interface
- Motion Detection, Email Notification
- Plug & Play P2P



S-16NV-1HD-265

16 Ch NVR

- H.265 +/H.265/H.264 Compression
- Up to 5MP Camera Supported
- Playback Resolution: 1080P
- 1 SATA Interface
- Motion Detection, Email Notification
- Plug & Play P2P



S-32NV-2HD-265

32 Ch NVR

- H.265 +/H.265/H.264 Compression
- Up to 5MP Camera Supported
- Playback Resolution: 1080P
- 2 SATA Interface
- Motion Detection, Email Notification
- Plug & Play P2P

S-32NV-4HDF-265

32 Ch NVR

- H.265 +/H.265/H.264 Compression
- Up to 5MP Camera Supported
- Playback Resolution: 1080P
- 4 SATA Interface
- Motion Detection, Email Notification
- Plug & Play P2P



SERIES FALCON




SIP-1S-2HDN-4

4 Ch NVR

- H.265+ Compression
- Up to 5MP Camera Supported
- Playback Resolution: 1080P
- 1 SATA Interface
- Motion Detection, Email Notification
- Plug & Play P2P



SIP-1S-2HDN-8

8 Ch NVR

- H.265+ Compression
- Up to 5MP Camera Supported
- Playback Resolution: 1080P
- 1 SATA Interface
- Motion Detection, Email Notification
- Plug & Play P2P



S-16NV-2HD-2HN

16 Ch NVR

- H.265+ Compression
- Up to 8MP Camera Supported
- Playback Resolution: 1080P
- 1 SATA Interface
- Ethernet: 10/100/1000M
- Motion Detection, Email Notification
- Plug & Play P2P



S-32NV-4HDS-265

32 Ch NVR

- H.265+ Compression
- Support Cloud upgrade & Cloud Storage
- Up to 8MP Camera Supported
- Playback Resolution: 1080P
- 2 SATA Interface
- Motion Detection, Email Notification
- Smart Detection & Smart Playback
- Plug & Play P2P
- Support Corridor



S-32NV-4HDG-265

32 Ch NVR

- H.265+ Compression
- Support Cloud upgrade & Cloud Storage
- Up to 8MP Camera Supported
- Playback Resolution: 1080P
- 4 SATA Interface
- Motion Detection, Email Notification
- Smart Detection & Smart Playback
- Plug & Play P2P
- Support Corridor



SIP-9S-8HD-64

64 Ch NVR

- H.265+ Compression
- Support Cloud upgrade & Cloud Storage
- Up to 8MP Camera Supported
- Playback Resolution: 1080P
- 8 SATA Interface
- Motion Detection, Email Notification
- Smart Detection & Smart Playback
- Plug & Play P2P
- Support Corridor

PROJECT SERIES

2MP

H.264 COMPRESSION

ONVIF



2MP: 2S-MDIR-2M

Dome IR Camera

- 1/2.9" progressive scan CMOS
- 2MP Resolution
- 3.6 mm Fixed Lens
- 6 IR LED (10m IR Range)
- POE Supported
- SD Card Supported
- Defog, BLC, WDR, ROI Supported
- Audio and Alarm Supported
- Communication Interface: 10/100M
- IP 66 Rated



**2MP: S-DIRV-2M (Varifocal)
2MP: S-DIRM-2M (Motorized)**

Dome IR Camera (Varifocal / Motorized)

- 1/2.9" progressive scan CMOS
- 2MP Resolution
- 2.8 ~ 12 mm Varifocal/Motorized Lens
- 30 SMD LED (30m IR Range)
- SD Card & POE Supported
- Defog, BLC, WDR, ROI Supported
- Audio and Alarm Supported
- Communication Interface: 10/100M
- IP 66 Rated



2MP: S-WIR-2M

Bullet IR Camera

- 1/2.9" progressive scan CMOS
- 2MP Resolution
- 3.6 mm Fixed Lens
- 6 Array LED (20m IR Range)
- POE Supported
- SD Card Supported
- Defog, BLC, WDR, ROI Supported
- Audio and Alarm Supported
- Communication Interface: 10/100M
- IP 66 Rated



**2MP: S-WIRV-2M (Varifocal)
2MP: S-WIRM-2M (Motorized)**

Bullet IR Camera (Varifocal / Motorized)

- 1/2.9" progressive scan CMOS
- 2 MP Resolution
- 2.8 ~ 12 mm Varifocal / Motorized Lens
- 6 Array LED (50m IR Range)
- SD Card & POE Supported
- Defog, BLC, WDR, ROI Supported
- Audio and Alarm Supported
- Communication Interface: 10/100M
- IP 66 Rated



2MP: S-CM-2M

Box Camera

- 1/2.9" progressive scan CMOS
- 2 MP Resolution
- C/CS Lens
- POE Supported
- SD Card Supported
- Defog, BLC, WDR, ROI Supported
- Audio and Alarm Supported
- Communication Interface: 10/100M
- IP 66 Rated

Smart Analytics: Motion detection, Intrusion detection, Line crossing, Storage exception

LPR CAMERA



2MP LPR Mini Bullet Camera

- 1/2.8" Progressive Scan CMOS
- Motorized 2.8~12mm / 3.0 ~10.5mm/7~22mm @F1.4
- 1920x1080 Resolution
- 120km/h Max. Vehicle Speed



2MP LPR Pro Bullet Camera

- 1/2.8" Progressive Scan CMOS
- Motorized 3.0~10.5mm / 2.8 ~ 12mm/7~22mm @F1.4
- 1920x1080 Resolution
- 120km/h Max. Vehicle Speed
- G.711/AAC Audio



2MP LPR 12X AF Pro Bullet Camera

- 1/2.8" Progressive Scan CMOS
- 5.3~64mm @F1.6~F2.8, 12x Optical Zoom
- 1920x1080 Resolution
- 120km/h Max. Vehicle Speed
- G.711/AAC Audio



2MP LPR Bullet Camera With Illuminator

- Sony CMOS sensor
- 0-120km/h speed adjustable
- 1920*1080P Resolution
- H.264 high profile, M-JPEG
- 1ch Alarm IN/OUT, Audio
- 32G TF Card Slot
- IP66 Rated
- With Illuminator

4MP

H.265 COMPRESSION

SIP
supported

ONVIF



4MP: S-D4SIP-F

Dome IR Camera

- 1/3" progressive scan CMOS
- 4 MP Resolution
- 3.6 mm Fixed Lens
- 4 Array LED (20m IR Range)
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Audio Supported
- Motion Detection, 3D DNR, ROI, BLC Supported
- IP 67 Rated, Vandalproof



4MP: S-W4SIP-F

Bullet IR Camera

- 1/3" progressive scan CMOS
- 4 MP Resolution
- 3.6 mm Fixed Lens
- 4 Array LED (35m IR Range)
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Motion Detection, 3D DNR, ROI, BLC
- IP 67 Rated



4MP: S-W4SIP-35M

Bullet IR Camera (Motorized)

- 1/3" progressive scan CMOS
- 4 MP Resolution
- 2.8 ~ 12mm Motorized Lens
- 4 Array LED (35m IR Range)
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Motion Detection, 3D DNR, ROI, BLC
- IP 67 Rated



4MP: S-W4SIP-70M

Bullet IR Camera (Motorized)

- 1/3" progressive scan CMOS
- 4 MP Resolution
- 7 ~ 22mm Motorized Lens
- 4 Array LED (70m IR Range)
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Motion Detection, 3D DNR, ROI, BLC
- IP 67 Rated



4MP: SPRO-D4SIP-30M

Dome IR Camera (Motorized)

- 1/3" progressive scan CMOS
- 4 MP Resolution
- 3.0~10.5mm/7~22mm Motorized Lens
- 3 Array LED (30m IR Range)
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Audio & Alarm Supported
- Super WDR (140dB)
- Motion Detection, 3D DNR, ROI, BLC Supported
- IP 66 Rated, Vandalproof



4MP: SPRO-W4SIP-35M

Bullet IR Camera (Motorized)

- 1/3" progressive scan CMOS
- 4 MP Resolution
- 2.8 ~ 12mm Motorized Lens
- 4 Array LED (35m IR Range)
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Audio & Alarm Supported
- Super WDR (140dB)
- Motion Detection, 3D DNR, ROI, BLC Supported
- IP 67 Rated



4MP: SPRO-W4SIP-70M

Bullet IR Camera (Motorized)

- 1/3" progressive scan CMOS
- 4 MP Resolution
- 7 ~ 22mm Motorized Lens
- 4 Array LED (70m IR Range)
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Audio & Alarm Supported
- Super WDR (140dB)
- Motion Detection, 3D DNR, ROI, BLC Supported
- IP 67 Rated



4MP: SPRO-C4SIP

Box Camera

- 1/3" progressive scan CMOS
- 4 MP Resolution
- C/CS Lens
- POE Supported
- SD Card Supported
- SIP/VoIP Supported
- Audio & Alarm Supported
- Super WDR (140dB)
- Motion Detection, 3D DNR, ROI, BLC Supported

SPEED DOME CAMERA



Metal Housing IP66

2MP: SIP-HSD-2HD-10XM-SDALM

10x High Speed Dome Cameras

- 1/2.8" CMOS Sensor
- 10x Optical Zoom
- Focus Length 5 ~ 50mm
- 60m IR Range
- Preset 128
- H.264 Compression
- SD Card, Alarm, Audio



Metal Housing IP66

2MP: SIP-HSD-2HD-36XM-SDALM

36x High Speed Dome Cameras

- 1/2.8" CMOS Sensor
- 36x Optical Zoom
- Focus Length 5 ~ 120mm
- 150m IR Range
- Preset 256
- H.264 Compression
- SD Card, Alarm, Audio



Metal Housing IP66

3MP: SIP-HSD-3HD-36XM-SDALM

36x High Speed Dome Cameras

- 1/1.8" CMOS Sensor
- 36x Optical Zoom
- Focus Length 5 ~ 120mm
- 150m IR Range
- Preset 256
- H.264 Compression
- SD Card, Alarm, Audio



Metal Housing IP66

5MP: SIP-HSD-5HD-36XM-SDALM

36x High Speed Dome Cameras

- 1/1.8" CMOS Sensor
- 36x Optical Zoom
- Focus Length 5 ~ 120mm
- 150m IR Range
- Preset 256
- H.264 Compression
- SD Card, Alarm, Audio

4K Series NVR



SPRO-2S-4KHD-36

36 Ch NVR with 2HDD

- H.265/H.264 Compression
- 8MP Camera Supported
- 2 SATA Interface
- 3G, WiFi Supported
- 36 Network Audio Input
- Alarm Supported
- Plug & Play P2P
- E-SATA Supported



SPRO-8HS-4KHD-64

64 Ch NVR with 8HDD (Hotswappable)

- H.265/H.264 Compression
- 8MP Camera Supported
- 8 SATA Interface (Hot Swappable HDD)
- RAID Supported
- 3G, WiFi Supported
- 64 Network Audio Input
- Alarm Supported
- Plug & Play P2P
- E-SATA Supported



SPRO-8HS-4KHD-128

128 Ch NVR with 8HDD (Hotswappable)

- H.265/H.264 Compression
- 8MP Camera Supported
- 8 SATA Interface (Hot Swappable HDD)
- RAID Supported
- 3G, WiFi Supported
- 128 Network Audio Input
- Alarm Supported
- Plug & Play P2P
- E-SATA Supported



SPRO-8HS-4KHD-128RP

128 Ch NVR with 8HDD (Hotswappable)

- H.265/H.264 Compression
- 8MP Camera Supported
- 8 SATA Interface (Hot Swappable HDD)
- RAID Supported
- 3G, WiFi Supported
- 128 Network Audio Input
- Alarm Supported
- Redundant Power Supply
- E-SATA Supported



SPRO-16HS-4KHD-128

128 Ch NVR with 16HDD (Hotswappable)

- H.265/H.264 Compression
- 8MP Camera Supported
- 16 SATA Interface (Hot Swappable HDD)
- RAID Supported
- 3G, WiFi Supported
- 128 Network Audio Input
- Alarm Supported
- E-SATA Supported



SPRO-16HS-4KHD-256RP

256 Ch NVR with 16HDD (Hotswappable)

- H.265/H.264 Compression
- 8MP Camera Supported
- 16 SATA Interface (Hot Swappable HDD)
- RAID Supported
- 3G, WiFi Supported
- 256 Network Audio Input
- Alarm Supported
- Redundant Power Supply
- E-SATA Supported



SPRO-24HS-4KHD-128

128 Ch NVR with 24HDD (Hotswappable)

- H.265/H.264 Compression
- 8MP Camera Supported
- 24 SATA Interface (Hot Swappable HDD)
- RAID Supported
- 3G, WiFi Supported
- 128 Network Audio Input
- Alarm Supported
- E-SATA Supported




SPRO-24HS-4KHD-256RP

256 Ch NVR with 24HDD (Hotswappable)

- H.265/H.264 Compression
- 8MP Camera Supported
- 24 SATA Interface (Hot Swappable HDD)
- RAID Supported
- 3G, WiFi Supported
- 256 Network Audio Input
- Alarm Supported
- Redundant Power Supply
- E-SATA Supported

SMART FUNCTIONS

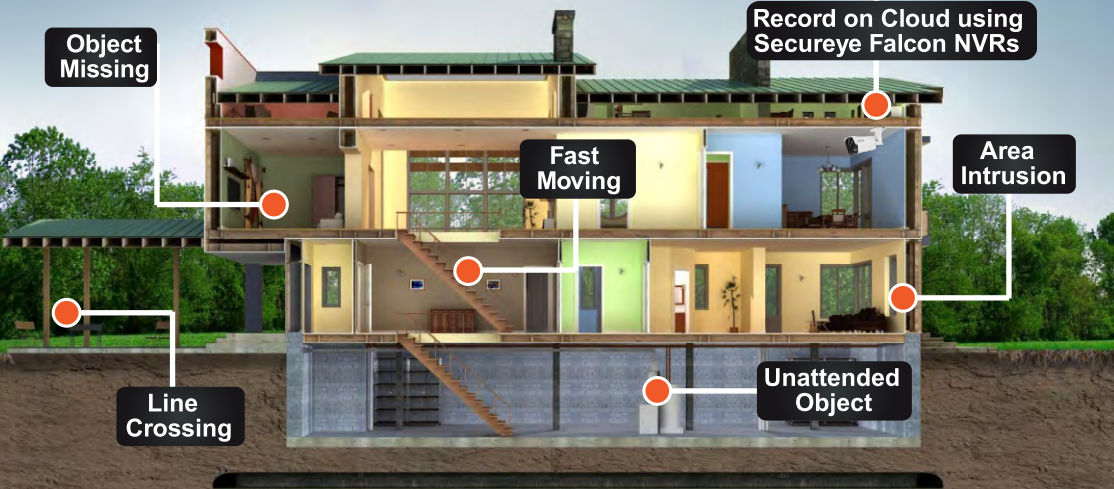

360° Network VR CAMERA & NVR



S-VR50 / S-VR30K

Panoramic VR Camera w LAN

- 2 / 3 Mega Pixel Sensor
- Resolution: 1920×1080 / 2048x1536
- Lens: 1.44mm
- Visual angle: 360°
- PTZ: Horizontal: 0°~360°, Vertical: -90° ~ 90°
- Video Compression: H.264
- WiFi Supported
- Support Micro SD Card Up to 128GB
- IR Distance: 5-10M



SIP-13HD-DIRF

SIP-2HD-DIRF

Panoramic VR Camera

- 1.3 / 2Mega Pixel Sensor
- Resolution: 1280×960 / 1920x1080
- Lens: Fish Eye Wide-angle Lens
- Visual Angle: 360°
- Video Compression: H.264
- WiFi Supported
- Support Micro SD Card Up to 128GB
- IR Distance: 5-10M

VR NVR



SIP-1S-VR4

4CH VR NVR

- 4 Channel NVR
- 1 CH. HDMI Resolution:1920x1080P/60Hz; 4K/30Hz
- Video Compression: H.265, H.264
- Audio Supported
- 1 * SATA Interface
- HDMI Output



SIP-1S-VR8

8CH VR NVR

- 8 Channel NVR
- 1 CH. HDMI Resolution:1920x1080P/60Hz; 4K/30Hz
- Video Compression: H.265, H.264
- Audio Supported
- 1 * SATA Interface
- 6TB In Max Storage Capacity
- HDMI Output

3G & 4G



SIP-2HDG-W20

2MP WiFi Bullet Camera with 3G/4G

- 3.6mm Lens, Angle: 80°
- Sony STARVIS 2MP 1/2.8 IMX307 CMOS
- Smart H.264 Video Compression
- IR Distance: 30m
- Communication interface: WiFi Connection Mode
- Support TF Card (Max 128 GB) / Cloud Storage
- Port agreement: Cloud privacy agreement
- General function: Anti flicker, double stream, mirror, password protection, watermark

WiFi Camera






SIP-2HD-DIRG

2MP WiFi Bullet Camera

- 3.6mm Lens, Angle: 80°
- 2MP HD:1920x1080 Resolution
- Smart H.264 Video Compression
- IR Distance: 30m
- WiFi Connection Mode
- Cloud storage, WIFI, Remote control, Automatic alarm, Night vision, Motion detection
- Support TF Card (Max 128 GB) / Cloud Storage
- Cloud Service



-  Financial-level security
-  HD image quality
-  Cloud control
-  Cloud storage
-  Quick install
-  WiFi connection
-  3D noise reduction
-  Viewing when power on
-  P2P
-  SD card storage

WiFi
2MP Cube Camera
 With Panoramic View

Model No: S-C10
Specification

- 360 degree panoramic view with full surveillance without blind spots
- HD:1920x1080 / SD:640x640, Resolution
- Smart H.264 Compression
- WiFi Connection Mode
- Cloud Service

WiFi
2MP Cube Camera
 With Dual Lens

Model No: S-F30

Specification

- 720 degree panoramic view with full surveillance without blind spots
- HD:1920x1080 / SD:640x640, Resolution
- Smart H.264 Compression
- WiFi Connection Mode
- Cloud Service

-  Financial-level security
-  HD image quality
-  Cloud control
-  Cloud storage
-  Quick install
-  WiFi connection
-  3D noise reduction
-  Viewing when power on
-  P2P
-  SD card storage












WiFi
2MP Network PTZ
 Cloud Camera

Model No: S-P70

Specification

- 360 degree PAN, 90 degree Tilt view
- HD:1920x1080 / SD:640x640, Resolution
- Smart H.264 Compression
- WiFi Connection Mode
- Cloud Service


-  Financial-level security
-  HD image quality
-  Cloud control
-  Cloud storage
-  Quick install
-  WiFi connection
-  3D noise reduction
-  Viewing when power on
-  P2P
-  SD card storage

WiFi
1.3MP Network PTZ
 Cloud Camera

Model No: S-P80

Specification

- 360 degree PAN, 90 degree Tilt view
- HD:1280x1024 / SD:640x640, Resolution
- Smart H.264 Compression
- WiFi Connection Mode
- Cloud Service

-  Financial-level security
-  HD image quality
-  Cloud control
-  Cloud storage
-  Quick install
-  WiFi connection
-  3D noise reduction
-  Viewing when power on
-  P2P
-  SD card storage





Battery Camera
2MP WIFI Battery Camera

- 2.8mm Lens
- 2MP HD:1920x1080 Resolution
- Smart H.264 Video Compression
- IR Distance: 20m
- WiFi Connection Mode
- WIFI, Remote control, Automatic alarm, Night vision, Motion detection
- Support TF Card (Max 128 GB)
- Support 4 cells AA batteries



S-P90
2MP WIFI PT Camera

- 3.6mm Lens, Angle: 80°
- 2MP HD:1920x1080 Resolution
- Smart H.264 Video Compression, Dual Stream
- IR Distance: 20m
- WiFi / LAN Connection Mode
- WIFI, Remote control, Automatic alarm, Night vision, Motion detection
- Support TF Card (Max 128 GB)
- Two way voice intercom

WiFi Camera & NVR KIT



S-4WK
4 Channel Wireless NVR KIT

- Video input: 4ch D1/960H/720P/960P
- HDMI Output: 1ch, Resolution:1024x768, 1366x768, 1440x900, 1920x1080
- VGA Output: 1ch, Resolution:1024x768, 1366x768, 1440x900, 1920x1080
- Resolution: D1/960H/720P/960P
- Playback: 4ch
- Recording: Manual,time,motion dection,alarm
- Storage: 1 SATA
- Storage capacity: 4TB for each HDD



S-8WK
8 Channel Wireless NVR KIT

- Video input: 8ch D1/960H/720P/960P
- HDMI Output: 1ch, Resolution:1024x768, 1366x768, 1440x900
- VGA Output: 1ch, Resolution:1024x768, 1366x768, 1440x900
- Resolution: D1/960H/720P/960P
- Playback: 4ch
- Recording: Manual,time,motion dection,alarm
- Storage: 1 SATA
- Storage capacity: 4TB for each HDD

WiFi Face Recognition Cube Camera

Model No: S-C30



Specification

- 1/7" 2MP CMOS sensor
- 1920x1080 Resolution
- Smart H.264 Compression
- WiFi Connection Mode
- Two Way Audio, Capture, Motion Detection Alarm, Remote Password Protection, Remote Playback
- Cloud Storage



LCD WIFI KIT



- 11.6 Inch LED Display
- 1366x768 LCD Resolution
- H.264 Compression
- 4 Channel Preview / 4CH Playback
- 2.4G WiFi Range

- Networking Protocol: Support DHCP, DNS, DDNS, NTP, Email, IP Search etc
- Real-time, regular, Event, External File, Log, Smart Playback
- 2.5" HDD, Maximum Support 2TB



Full HD 2.0MP (4 CH)

SIP-1HDG-DIR / SIP-1S-2HDP-4



Financial-level security



HD image quality



Quick install



WiFi connection



P2P



Cloud control



Timely alarm output



3D noise reduction



Viewing when power on



SD card storage

Ethernet to Fiber Converter



S-SMSF-FE

1 port 10/100 Media Converter

- 10/100M Transmission Speed
- Ethernet Port: RJ45, Fiber port: SC/LC
- Full-duplex and semiduplex
- Trans. distance: Up to 20/40/60/80Km



S-4SMSF-FE/S-4SMSF-GE

4 port 10/100 Media Converter

- 10/100M Transmission Speed
- Ethernet Port: RJ45, Fiber port: SC/LC
- Full-duplex and semiduplex
- Trans. distance: Up to 20/40/60/80Km



S-8SMSF-FE/S-8SMSF-GE

8 port 10/100 Media Converter

- 10/100M Transmission Speed
- Ethernet Port: RJ45, Fiber port: SC/LC
- Full-duplex and semiduplex
- Trans. distance: Up to 20/40/60/80Km



S-SMSF-GE

1 port 10/100/1000 Media Converter

- 10/100/1000M Transmission Speed
- Ethernet Port: RJ45, Fiber port: SC/LC
- Full-duplex and semiduplex
- Trans. distance: Up to 20/40/60/80Km



S-14RC

14Bay Rackmountable Rack

- Support 2pcs independent hot plug power modules.
- Support 14pcs slots for independent media converter, it can insert AP7-10/100M external power supply media converter.
- Built-in 2pcs high capability fans, to advance chassis airness and cooling.



S-EP200

EPON Media Converter

- User interface: Single 10/100/1000 RJ45 port
- Transmission speed: upstream/downstream symmetrical 10/100/1000
- Network coverage radius: 20KM
- VLAN: Port-based VLAN, GVRP & IEEE 802.1Q VLAN

SFP MODULE



**S-SFP-3K-LCT
S-SFP-3K-LCR**

1.25G SFP Module Single mode Single Fiber 3 KM LC (Transmitter & Receiver)

- Support WDM Bi-directional Technology
- Wave Length: TX - 1550nm, RX - 1310nm
- Max Cable Length: 3KM
- Port Type: LC/UPC
- Data Rate: 1.25Gbps



**S-SFP-20K-LCT
S-SFP-20K-LCR**

1.25G SFP Module Single mode Single Fiber 20KM LC (Transmitter & Receiver)

- Support WDM Bi-directional Technology
- Wave Length: TX - 1550nm, RX - 1310nm
- Max Cable Length: 20KM
- Port Type: LC/UPC
- Data Rate: 1.25Gbps



**S-10GSFP-20K-LCT
S-10GSFP-20K-LCR**

10G SFP Module Single mode Single Fiber 20 KM LC (Transmitter & Receiver)

- Support WDM Bi-directional Technology
- Wave Length: TX - 1550nm, RX - 1310nm
- Max Cable Length: 20KM
- Port Type: LC/UPC
- Data Rate: 10Gbps

POWER SUPPLY



400-IB



800-IB



1600-IB



S-5B



S-10B



S-20B

Passive Video Balun

Works with Analogue/AHD/TVI/CVI Cameras



S-PVB-1P

1 Pair Passive Video Balun (Video only)

- Supports Single Camera
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video Only
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 440m



S-PVB-1PV

1 Pair Passive Video Balun (Power & Video)

- Supports Single Camera
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video with Power
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 440m



S-PVB-4P

4 channel Passive Video Balun (Video only)

- Supports up to 4 Cameras
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video Only
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 440m

S-PVB-8P

8 channel Passive Video Balun (Video only)



- Supports up to 8 Cameras
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video Only
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 440 meter



S-PVB-16P

16 channel Passive Video Balun (Video only)

- Supports up to 16 Cameras
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video Only
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 440 meter

ACTIVE VIDEO BALUN



S-AVB-1P

1 Pair Active + Passive Video Balun for Long Distance (Power & Video)

- Supports Single Camera
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video & Power
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 500m



S-AVB-4P

4 Channel Active Video Balun for Long Distance (Power & Video)

- Supports up to 4 Cameras
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video & Power
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 400 meter



S-AVB-8P

8 channel Active Video Balun for Long Distance (Power & Video)

- Supports up to 8 Cameras
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video & Power
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 400 meter



S-AVB-16P

16 channel Active Video Balun for Long Distance (Power & Video)

- Supports up to 16 Cameras
- Realtime Transmission over UTP Cat5/6 Cable
- Transmit Video & Power
- Compatible with HD-TVI, HD-CVI, AHD & CVBS
- Transmit distance up to 400 meter

POWER SUPPLY



PA-12V2A / PA-12V4A



S-5A



S-10A



S-20A



Police Vehicle




Transport Vehicle



Ambulance



School Bus

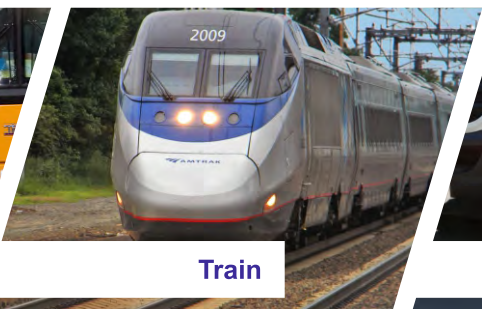

Train

Analog Mobile Surveillance



S-4C1S-4M

Standalone Mobile DVR

- 4 Channel Mobile DVR
- AHD Camera Supported
- H.264 Compression
- SD Card Supported
- Audio Supported



S-4C2H-4M

4G/WiFi/GPS Mobile DVR

- 4 Channel Mobile DVR
- AHD Camera Supported
- H.264 Compression
- Dual SD Card Supported
- 3G/4G Supported
- WiFi / GPS Supported
- Audio Supported



S-4C1S-2MDG

4G/WiFi/GPS Mobile DVR with HDD Support

- 4 Channel Mobile DVR
- AHD Camera Supported
- H.264 Compression
- SD Card & HDD Supported
- 3G/4G Supported
- WiFi / GPS Supported
- Audio Supported



Dome / Bullet Camera with Audio for Mobile DVR

- 1/3" HD CMOS
- 1.3 MP Dome/Bullet
- Day/ Night Camera
- IR Car Camera with Metal Housing
- IR LED Length 10m
- IP 69

3G & 4G

3G & 4G

IP Mobile Surveillance



S-M4V-NV

Standalone NVR

- 4 Channel Mobile NVR
- Up to 2MP Camera Supported
- H.264 Compression
- SSD / HDD Supported



S-M4V-4G-NV

Standalone NVR with 3G/4G & GPS

- 4 Channel Mobile NVR
- Up to 2MP Camera Supported
- H.264 Compression
- SSD / HDD Supported
- 3G/4G Supported
- GPS Supported
- WiFi (Optional)

3G & 4G



SIP-1HD-DIR / SIP-2HD-DIR

Dome IR Camera

- HD CMOS Sensor
- 1 & 2 MP Resolution
- 3.6 mm Fixed Lens
- 18 Nano LED (15 ~ 20m IR Range)
- H.264 Compression
- POE Supported (Optional)
- AWB, AGC, BLC, HLC, DWDR Supported
- Communication Interface: 10/100M

PoE Switch (10/100)



S-4FE-1UE-LD

4+1 Port Long Distance
10/100 Poe Switch

- 4 Port PoE Switch
- 1 Uplink Port
- PoE Transmission Distance up to 250m
- Whole Power 78W
- Each Port Output Power 15.4W/30W



S-4FE-2UE-LD

4+2 Port Long Distance
10/100 Poe Switch

- 4 Port PoE Switch
- 2 Uplink Port
- PoE Transmission Distance up to 250m
- Whole Power 78W
- Each Port Output Power 15.4W/30W



S-8FE-2UE-LD

8 (POE 10/100) + 2(10/100)
Port Long Distance Poe Switch

- 8 Port PoE Switch
- 2 Uplink Port (10/100)
- PoE Transmission Distance up to 250m
- Whole Power 250W
- Each Port Output Power 15.4W/30W



S-8FE-1UE-1UF

8+1+1 Port
10/100 Poe Switch

- 8 Port PoE Switch
- 1 Uplink Port Ethernet (10/100)
- 1 Uplink SFP Port
- PoE Transmission Distance up to 150m
- Whole Power 150W



S-16FE-2UG-LD-250W

16+2Port
10/100 Poe Switch


- 16 Port PoE Switch
- 2 Uplink Port Ethernet (10/100/1000)
- PoE Transmission Distance up to 150m
- Whole Power 250W



S-16FE-2UG-1UF-250W

16 (POE 10/100) + 2 (10/100/1000) +
1 (10G) SFP Slot Port Switch

- 16 Port PoE Switch
- 2 Uplink Port Ethernet (10/100/1000)
- 1 Uplink SFP Port
- PoE Transmission Distance up to 150m
- Whole Power 250W



S-16FE-2UG-2UF-250W

16 (POE 10/100) + 2 (10/100/1000)
+ 2 (10G) SFP Slot Port Switch

- 16 Port PoE Switch
- 2 Uplink Port Ethernet (10 / 100 / 1000)
- 2 Uplink SFP Port
- PoE Transmission Distance up to 150m
- Whole Power 250W



S-24FE-2UG-2UF-400W

24 (POE 10/100) + 2 (10/100/1000) +
2(10G) SFP Slot Port Switch High Power
for Long Distance

- 24 Port PoE Switch
- 2 Uplink Port Ethernet (10/100/1000)
- 2 Uplink SFP Port
- PoE Transmission Distance up to 150m



S-POE-100E

Passive POE Range Extender

- 10/100 PoE Standart
- No External Power Supply Required
- Up to 3 PoE Extender can Connect
- 15.4w Output Wattage
- Support Overheating & Short Circuit Protection



Giga PoE Switch (10/100/1000)



S-4GE-1UG-1UF

**4 Port +1+1
10/100/1000 PoE Switch**

- 4 Port PoE Switch
- Transmission Distance up to 150m
- 1 Uplink Port Ethernet (10/100/1000)
- 1 Uplink SFP Port
- Whole Power 150W
- Each Port Output Power 15.4W/30W
- Switch Capability: 1.6Gbps



S-8GE

**8 Port
10/100/1000 PoE Switch**

- 8 Port PoE Switch
- Transmission Distance up to 150m
- Whole Power 150W
- Each Port Output Power 15.4W/30W
- Switch Capability: 1.6Gbps



S-8GE-2UG-1UF

**8(PoE 10/100/1000) +2 (10/100/1000)
+1 (10G) SFP Slot Port Switch**

- 8 Port PoE Switch
- 2 Uplink Port Ethernet (10/100/1000)
- 1 Uplink SFP Port
- Transmission Distance up to 150m
- Whole Power 250W
- Each Port Output Power 15.4W/30W
- Switch Capability: 7.2Gbps



S-16GE-2UG-250W

**16(PoE 10/100/1000) +2 (10/100/1000)
Port Switch**

- 16 Port PoE Switch
- 2 Uplink Port Ethernet (10/100/1000)
- Transmission Distance up to 150m
- Whole Power 250W
- Each Port Output Power 15.4W/30W
- Switch Capability: 8.8Gbps



S-24GE-2UG-250W

**24 (PoE 10/100/1000) +2 (10/100/1000)
Port Switch**

- 24 Port PoE Switch
- 2 Uplink Port Ethernet (10/100/1000)
- PoE Transmission Distance up to 150m
- Whole Power 250W
- Each Port Output Power 15.4W/30W

Layer 2 Managed PoE Switch



**Managed Switch
L2 8 Port + 2SFP Giga**

- 8 10/100/1000Mbps RJ45 port
- 2 Gigabit SFP fiber port
- 1 Console port
- POE: Total max 150W
- Single port max 46W
- 8POE LED indicator
- Bandwidth: 20Gbps
- Packet forwarding rate: 14.88Mpps



**Managed Switch
L2 16 Port + 2SFP Giga**

- 16 10/100/1000Mbps RJ45 port
- 2 Gigabit SFP
- 1 Console port
- POE: Total max 150W
- Single port max 46W
- 16POE LED indicator
- Bandwidth: 36Gbps
- Packet forwarding rate: 23.8Mpps



**Managed Switch
L2 24 Port + 2SFP Giga**

- 10/100/1000Mbps PoE RJ45 port
- 2 Gigabit SFP (25 port-26 port)
- POE: Total max 250W
- Full wired-speed store-and-forward
- MAC address capacity: 8K
- Bandwidth: 52Gbps (non-blocking)

Cables

Copper Cables

Cat 5e (INDOOR)



- 100M (4 PAIR)
- 305M (4 PAIR)
- 305M (2 PAIR)

Cat 5e (OUTDOOR)



- 305M (4 PAIR)
- 305M (4 PAIR DUAL LAYER)
- 305M (Shielded)

Cat 6 (INDOOR)



- 100M (4 PAIR)
- 305M (2 PAIR)

Cat 6 (OUTDOOR)



- 305M (4 PAIR)
- 305M (4 PAIR DUAL LAYER)
- 305M (Shielded)

Alloy cables

Cat 5e (INDOOR)



- 100M (4 PAIR)
- 305M (4 PAIR)
- 305M (2 PAIR)

Cat 6 (INDOOR)



- 100M (4 PAIR)
- 305M (4 PAIR)
- 305M (2 CORE)

Coaxial cables

P2E (2+1)



Rg59 Cable + Power
2+1 (S-RG59-P2E-1)
3+1 (S-RG59-P3E-1)

P3C (3+1)



Rg59 Cable + Power
2+1 (S-RG59-P2C)
3+1 (S-RG59-P3C)
3+1 (S-RG59-P3C-BP)

P2H (2+1)



Rg6 Cable
2+1 (S-RG59-P2H-1)
3+1 (S-RG59-P3H-1)

P3H (3+1)



Rg11 Cable
Normal (S-RG11)
Armored (S-RG6-AR)

www.secureye.com

201906



Distributed in India by

Fortune Marketing Pvt. Ltd.

D-1/2, Okhla Industrial Area, Phase - II, New Delhi, Delhi, India

